



WALKS 2.0

UNCONVENTIONAL SIMPLICITY

A series that is attractive and timeless, Walks 2.0 reinterprets the appearance of quartzite in fine porcelain stoneware. An extremely resistant metamorphic rock and often hewn, quartzite possesses a unique appearance that's ideal for architectural applications.


Walks 2.0 combines technology and nature to produce a variety of colours, a natural surface and the texture of the hewn effect, which harmoniously bring together interior and exterior spaces with ease.



Floor // Grigio **WK02N** 375x750mm

3 VERSATILE COLOURS


Walks 2.0 consists of a colour scheme drawn from the evolution of style and colour trends to accentuate the collection's simplicity and rigour. White, grey and black offers plenty of versatility in design and architecture.

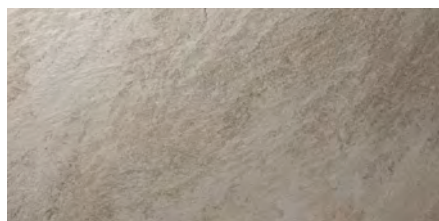

Bianca **WK01N**




Grigio **WK02N**

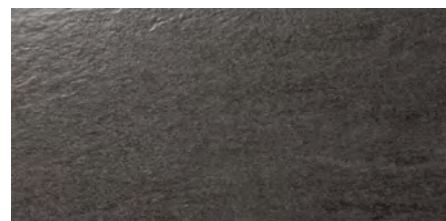

Nera **WK03N**

2 SIZES TO FIT ALL SPACES


Three versatile sizes for rooms of any proportion to create a truly personalised space.



750 x 750



375 x 750

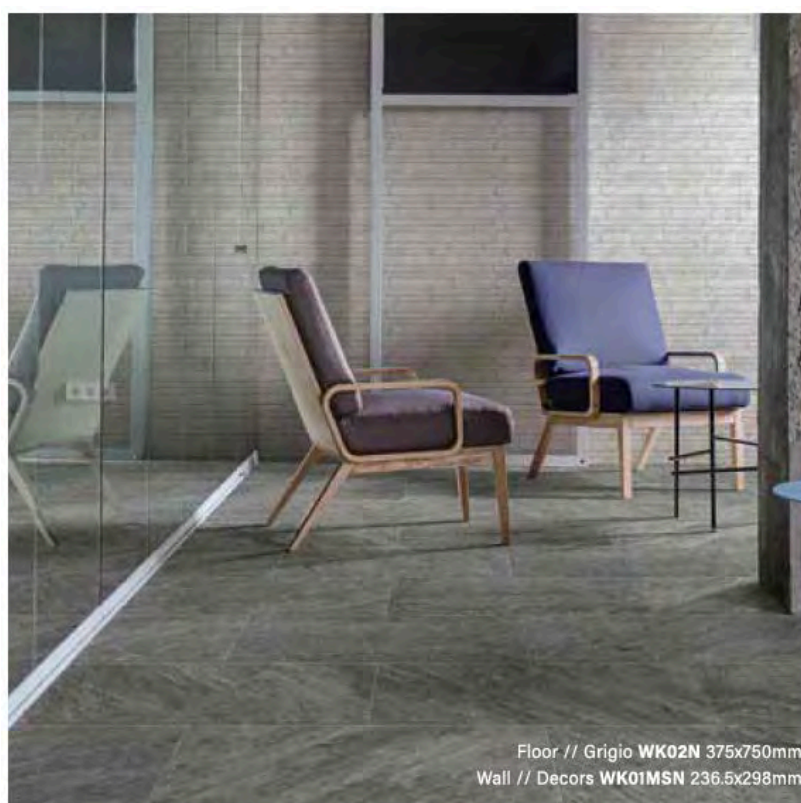

Floor // Grigio **WK02N** 375x750mm
Wall // Decors **WK01MSN** 236.5x298mm



A NATURAL FINISH

The natural finish of Walks 2.0 is perfect for interpreting indoor architecture and outdoor spaces that converse with the surroundings. Its slip resistance feature makes it ideal for use even in pools and wellness environments.

Floor // Grigio **WK02N** 375x750mm
Wall // Decors **WK01MSN** 236.5x298mm

STACKED EFFECT

Taking the form of stone walls in traditional English structures, these décor tiles are composed of interlocking strips in a contemporary manner. The highly-tactile stone-stacking effect is now effortlessly brought to life in any living environment.



Size: 236.5x298mm
Thickness: 10.5mm
Surface: Natural
Variation: Moderate Variation (V3)
Application: Wall & Floor

KEY IMPRESSIONS

A geometric composition inspired by the unmistakable design of piano keys to exude a strong, decorative personality. The different textural effects give the surface a three dimensional impression, effortlessly achieved by its random structure.

Size: 236x255mm
Thickness: 10.5mm
Surface: Natural
Variation: Moderate Variation (V3)
Application: Wall



Floor // Grigio **WK02N** 375x750mm
Wall // Decors **WK01MSN** 236.5x298mm

Natural Stone Design

WALKS 2.0

Glazed Porcelain Tiles
3 colours | 2 sizes | 1 surface

Features:



10.5mm
THICKNESS



RECTIFIED



MODERATE
VARIATION

Applications:



MIN. 3mm



WALL




FLOOR

Surface:

N Natural


AVAILABLE COLOURS:

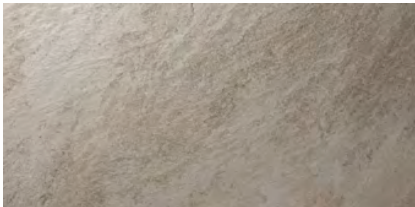

Bianca **WK01N**



Grigio **WK02N**

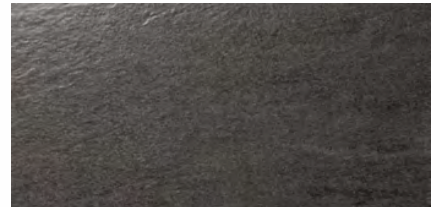

Nera **WK03N**

DECORS:

298 x 236.5mm

236 x 255mm



WK01MSN



WK02MSN



WK03MSN



WK01DTR




WK02DTR




WK03DTR

SIZES:



750x750

- Bianca **WK01N**
- Grigio **WK02N**
- Nera **WK03N**




375x750

- Bianca **WK01N**
- Grigio **WK02N**
- Nera **WK03N**



Bianca **WK01N**

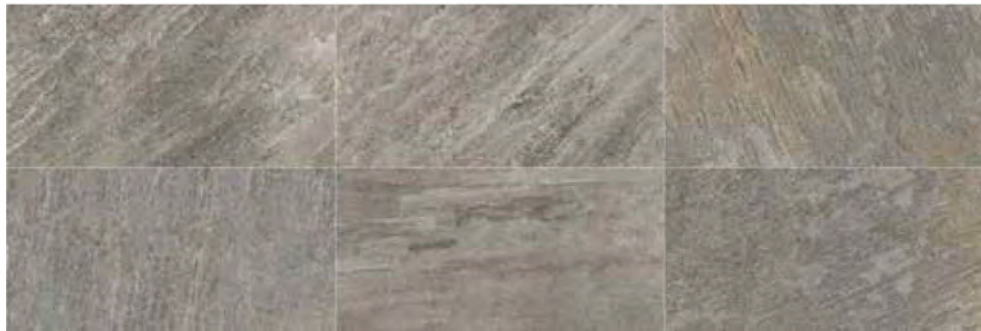












Grigio **WK02N**



Nera **WK03N**

Technical Specification
WALKS 2.0

Type Of Test	Standard Test MS ISO13006	ISO Standard Requirement	Feruni
Dimensions & Surface Quality			
 Length & Width	ISO 10545-2	± 0.6%	± 0.2%*
 Thickness	ISO 10545-2	± 5.0%	±5.0%
Straightness of Sides	ISO 10545-2	± 0.5%	± 0.2%
Rectangularity	ISO 10545-2	± 0.5%	± 0.2%
 Surface Flatness			
- Centre Curvature	ISO 10545-2	± 0.5%	± 0.2%
- Edge Curvature	ISO 10545-2	± 0.5%	± 0.2%
- Warpage	ISO 10545-2	± 0.5%	± 0.2%
 Surface Quality	ISO 10545-2	≥95% free from visible defect	≥95% free from visible
Physical Properties			
 Water Absorption	ISO 10545-3	Group BIa, E ≤ 0.5%	Group BIa, E ≤ 0.2%
 Breaking Strength	ISO 10545-4	≥ 1300N	≥ 1500N
 Modulus of Rupture	ISO 10545-4	Min. 35N/mm ²	Min. 38N/mm ²
 Surface Abrasion (PEI)	ISO 10545-7	Class 2-5	Class 3
 Thermal Shock	ISO 10545-9	No Visible Crack	No Visible Crack
Chemical Properties			
 Chemical Resistance	ISO 10545-13	Minimum Class GB	GA
 Stain Resistance	ISO 10545-14	Min Class 3	Min Class 3